

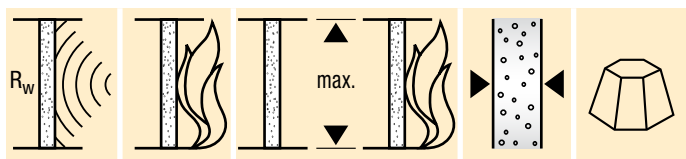


CARACTÉRISTIQUES DES CLOISONS EN PLÂTRE


CARREAUX DE PLÂTRE

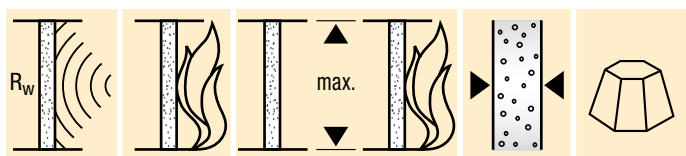


dB	Min.	m	m	mm	kg/m ²
34	90	3	3	60	60
37	120	4	4	80	80
39-43	120	5	5	100	100
45	240	7	6	140	140

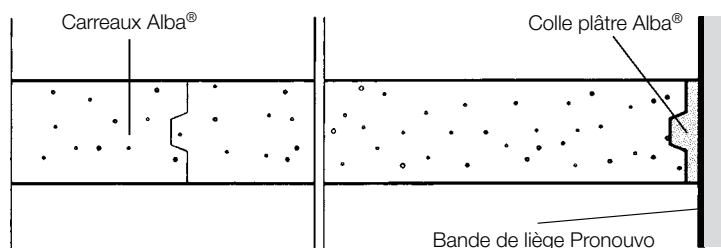


dB	Min.	m	m	mm	kg/m ²
35	60	4	4	80	64
37	90	5	5	100	74

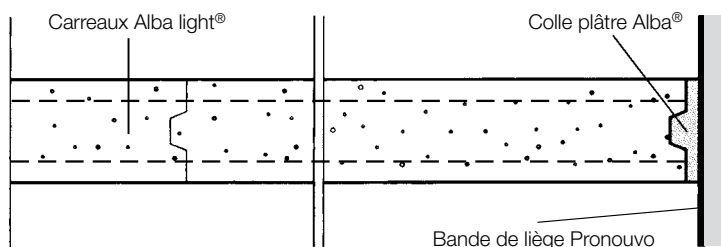


CLOISONS COMPOSITES EN CARREAUX DE PLÂTRE

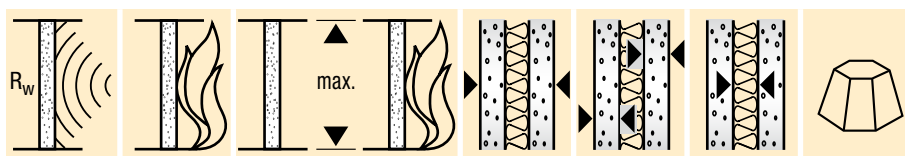

dB	Min.	m	m	mm	mm	mm	kg/m ²
58	90	3	3	115	60+25	30	87
56	90	3	3	130	60+40	30	102
57	120	4	4	125	80+25	20	107
57	120	5	5	145	100+25	20	127

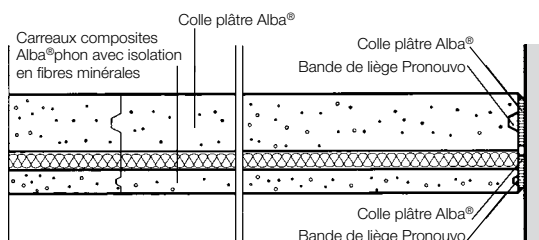

CLOISONS LÉGÈRES EN PLAQUES CARTONNÉES

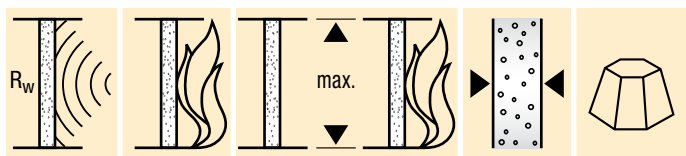

dB	Min.	m	m	mm	kg/m ²
45	30	3	3	75	26
49	30	4.5	4.5	100	26
49	30	5	5	125	26
51	90	4	4	100	50
53	90	5.5	5.5	125	50
53	90	6.5	6.5	150	50
55	90	4.5	4.5	155	53
56	90	6	6	205	53
57	90	6.5	6	255	53

- 1 Feutre en bande
- 2 Profilé U pour cloisons
- 3 Plaques de plâtre cartonnées Rigips
- 4 Isolation type S 45 mm, pour protection antifeu type F 50 mm
- 5 Profilé C pour cloisons

